Distributed by:

JAMECO® ELECTRONICS

**www.Jameco.com ✦ 1-800-831-4242**

The content and copyrights of the attached material are the property of its owner.

# General Purpose Transistors
## NPN Silicon

**MPS2222**
**MPS2222A***

*Motorola Preferred Device

Jameco Part Number 210665







**CASE 29–04, STYLE 1**
**TO–92 (TO–226AA)**

### MAXIMUM RATINGS

| Rating | Symbol | MPS2222 | MPS2222A | Unit |
|---|---|---|---|---|
| Collector–Emitter Voltage | $V_{CEO}$ | 30 | 40 | Vdc |
| Collector–Base Voltage | $V_{CBO}$ | 60 | 75 | Vdc |
| Emitter–Base Voltage | $V_{EBO}$ | 5.0 | 6.0 | Vdc |
| Collector Current — Continuous | $I_C$ | 600 | | mAdc |
| Total Device Dissipation @ $T_A$ = 25°C<br>Derate above 25°C | $P_D$ | 625<br>5.0 | | mW<br>mW/°C |
| Total Device Dissipation @ $T_C$ = 25°C<br>Derate above 25°C | $P_D$ | 1.5<br>12 | | Watts<br>mW/°C |
| Operating and Storage Junction Temperature Range | $T_J$, $T_{stg}$ | –55 to +150 | | °C |

### THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|---|---|---|---|
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 200 | °C/W |
| Thermal Resistance, Junction to Case | $R_{\theta JC}$ | 83.3 | °C/W |

### ELECTRICAL CHARACTERISTICS ($T_A$ = 25°C unless otherwise noted)

| Characteristic | | Symbol | Min | Max | Unit |
|---|---|---|---|---|---|
| **OFF CHARACTERISTICS** | | | | | |
| Collector–Emitter Breakdown Voltage<br>($I_C$ = 10 mAdc, $I_B$ = 0) | MPS2222<br>MPS2222A | $V_{(BR)CEO}$ | 30<br>40 | —<br>— | Vdc |
| Collector–Base Breakdown Voltage<br>($I_C$ = 10 μAdc, $I_E$ = 0) | MPS2222<br>MPS2222A | $V_{(BR)CBO}$ | 60<br>75 | —<br>— | Vdc |
| Emitter–Base Breakdown Voltage<br>($I_E$ = 10 μAdc, $I_C$ = 0) | MPS2222<br>MPS2222A | $V_{(BR)EBO}$ | 5.0<br>6.0 | —<br>— | Vdc |
| Collector Cutoff Current<br>($V_{CE}$ = 60 Vdc, $V_{EB(off)}$ = 3.0 Vdc) | MPS2222A | $I_{CEX}$ | — | 10 | nAdc |
| Collector Cutoff Current<br>($V_{CB}$ = 50 Vdc, $I_E$ = 0)<br>($V_{CB}$ = 60 Vdc, $I_E$ = 0)<br>($V_{CB}$ = 50 Vdc, $I_E$ = 0, $T_A$ = 125°C)<br>($V_{CB}$ = 50 Vdc, $I_E$ = 0, $T_A$ = 125°C) | <br>MPS2222<br>MPS2222A<br>MPS2222<br>MPS2222A | $I_{CBO}$ | <br>—<br>—<br>—<br>— | <br>0.01<br>0.01<br>10<br>10 | μAdc |
| Emitter Cutoff Current<br>($V_{EB}$ = 3.0 Vdc, $I_C$ = 0) | MPS2222A | $I_{EBO}$ | — | 100 | nAdc |
| Base Cutoff Current<br>($V_{CE}$ = 60 Vdc, $V_{EB(off)}$ = 3.0 Vdc) | MPS2222A | $I_{BL}$ | — | 20 | nAdc |

**Preferred** devices are Motorola recommended choices for future use and best overall value.

© Motorola, Inc. 1996

**ELECTRICAL CHARACTERISTICS** ($T_A$ = 25°C unless otherwise noted) (Continued)

| Characteristic | | Symbol | Min | Max | Unit |
|---|---|---|---|---|---|
| **ON CHARACTERISTICS** | | | | | |
| DC Current Gain | | $h_{FE}$ | | | — |
| ($I_C$ = 0.1 mAdc, $V_{CE}$ = 10 Vdc) | | | 35 | — | |
| ($I_C$ = 1.0 mAdc, $V_{CE}$ = 10 Vdc) | | | 50 | — | |
| ($I_C$ = 10 mAdc, $V_{CE}$ = 10 Vdc) | | | 75 | — | |
| ($I_C$ = 10 mAdc, $V_{CE}$ = 10 Vdc, $T_A$ = –55°C) | MPS2222A only | | 35 | — | |
| ($I_C$ = 150 mAdc, $V_{CE}$ = 10 Vdc)(1) | | | 100 | 300 | |
| ($I_C$ = 150 mAdc, $V_{CE}$ = 1.0 Vdc)(1) | | | 50 | — | |
| ($I_C$ = 500 mAdc, $V_{CE}$ = 10 Vdc)(1) | MPS2222 | | 30 | — | |
| | MPS2222A | | 40 | — | |
| Collector–Emitter Saturation Voltage(1) | | $V_{CE(sat)}$ | | | Vdc |
| ($I_C$ = 150 mAdc, $I_B$ = 15 mAdc) | MPS2222 | | — | 0.4 | |
| | MPS2222A | | — | 0.3 | |
| ($I_C$ = 500 mAdc, $I_B$ = 50 mAdc) | MPS2222 | | — | 1.6 | |
| | MPS2222A | | — | 1.0 | |
| Base–Emitter Saturation Voltage(1) | | $V_{BE(sat)}$ | | | Vdc |
| ($I_C$ = 150 mAdc, $I_B$ = 15 mAdc) | MPS2222 | | — | 1.3 | |
| | MPS2222A | | 0.6 | 1.2 | |
| ($I_C$ = 500 mAdc, $I_B$ = 50 mAdc) | MPS2222 | | — | 2.6 | |
| | MPS2222A | | — | 2.0 | |
| **SMALL–SIGNAL CHARACTERISTICS** | | | | | |
| Current–Gain — Bandwidth Product(2) | | $f_T$ | | | MHz |
| ($I_C$ = 20 mAdc, $V_{CE}$ = 20 Vdc, f = 100 MHz) | MPS2222 | | 250 | — | |
| | MPS2222A | | 300 | — | |
| Output Capacitance | | $C_{obo}$ | — | 8.0 | pF |
| ($V_{CB}$ = 10 Vdc, $I_E$ = 0, f = 1.0 MHz) | | | | | |
| Input Capacitance | | $C_{ibo}$ | | | pF |
| ($V_{EB}$ = 0.5 Vdc, $I_C$ = 0, f = 1.0 MHz) | MPS2222 | | — | 30 | |
| | MPS2222A | | — | 25 | |
| Input Impedance | | $h_{ie}$ | | | kΩ |
| ($I_C$ = 1.0 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | 2.0 | 8.0 | |
| ($I_C$ = 10 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | 0.25 | 1.25 | |
| Voltage Feedback Ratio | | $h_{re}$ | | | X $10^{-4}$ |
| ($I_C$ = 1.0 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | — | 8.0 | |
| ($I_C$ = 10 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | — | 4.0 | |
| Small–Signal Current Gain | | $h_{fe}$ | | | — |
| ($I_C$ = 1.0 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | 50 | 300 | |
| ($I_C$ = 10 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | 75 | 375 | |
| Output Admittance | | $h_{oe}$ | | | μmhos |
| ($I_C$ = 1.0 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | 5.0 | 35 | |
| ($I_C$ = 10 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) | MPS2222A | | 25 | 200 | |
| Collector Base Time Constant | | $rb'C_c$ | — | 150 | ps |
| ($I_E$ = 20 mAdc, $V_{CB}$ = 20 Vdc, f = 31.8 MHz) | MPS2222A | | | | |
| Noise Figure | | NF | — | 4.0 | dB |
| ($I_C$ = 100 μAdc, $V_{CE}$ = 10 Vdc, $R_S$ = 1.0 kΩ, f = 1.0 kHz) | MPS2222A | | | | |

**SWITCHING CHARACTERISTICS MPS2222A only**

| | | | | | |
|---|---|---|---|---|---|
| Delay Time | ($V_{CC}$ = 30 Vdc, $V_{BE(off)}$ = –0.5 Vdc, $I_C$ = 150 mAdc, $I_{B1}$ = 15 mAdc) (Figure 1) | $t_d$ | — | 10 | ns |
| Rise Time | | $t_r$ | — | 25 | ns |
| Storage Time | ($V_{CC}$ = 30 Vdc, $I_C$ = 150 mAdc, $I_{B1}$ = $I_{B2}$ = 15 mAdc) (Figure 2) | $t_s$ | — | 225 | ns |
| Fall Time | | $t_f$ | — | 60 | ns |

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.
2. $f_T$ is defined as the frequency at which $|h_{fe}|$ extrapolates to unity.

## SWITCHING TIME EQUIVALENT TEST CIRCUITS




**Figure 1. Turn–On Time**




Scope rise time < 4 ns
*Total shunt capacitance of test jig, connectors, and oscilloscope.

**Figure 2. Turn–Off Time**

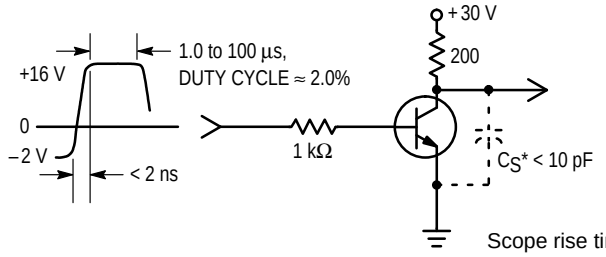


**Figure 3. DC Current Gain**

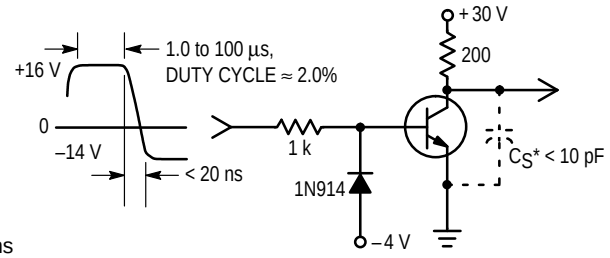


**Figure 4. Collector Saturation Region**

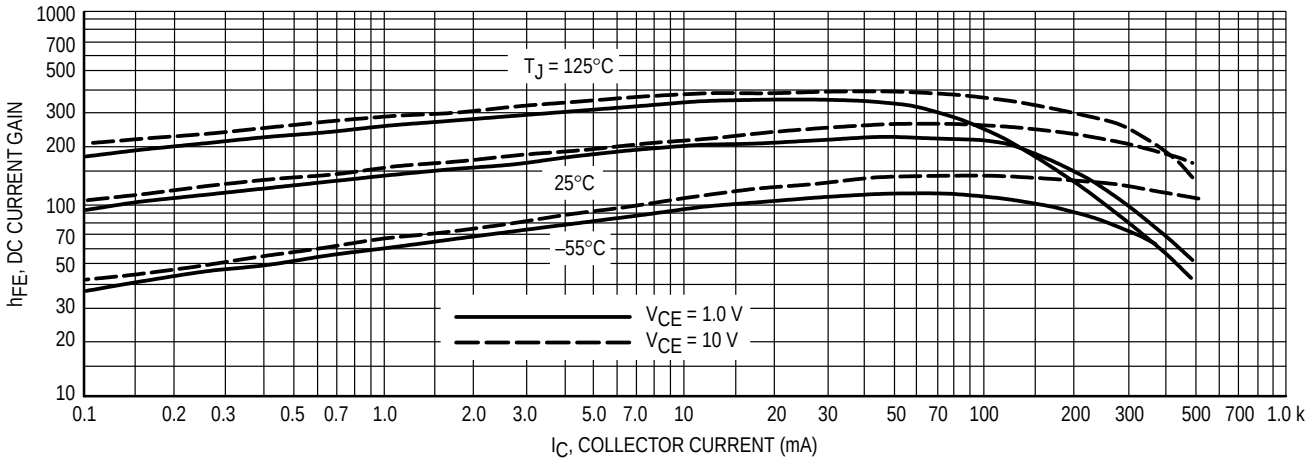


**Figure 5. Turn – On Time**

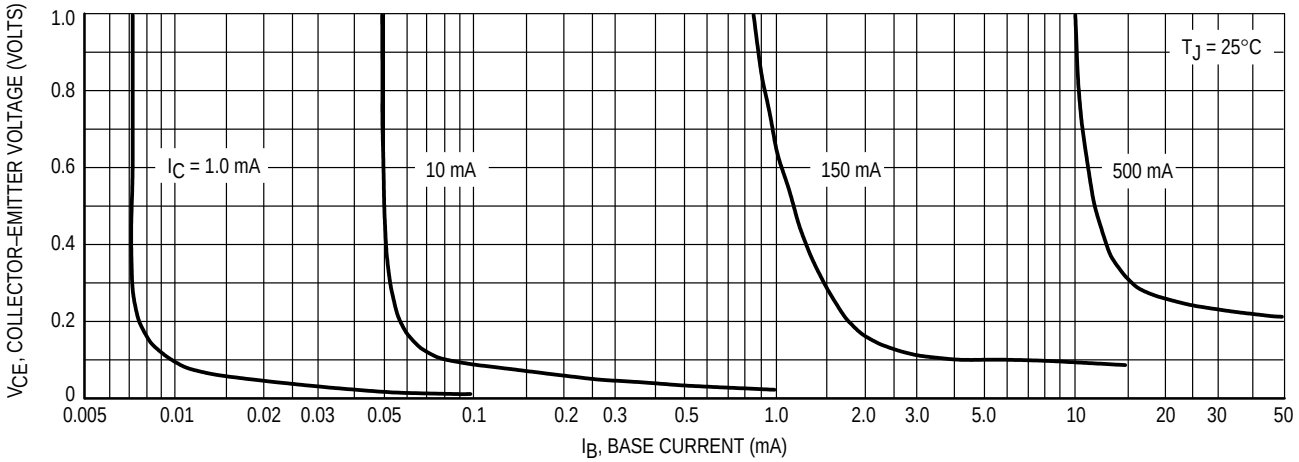


**Figure 6. Turn – Off Time**

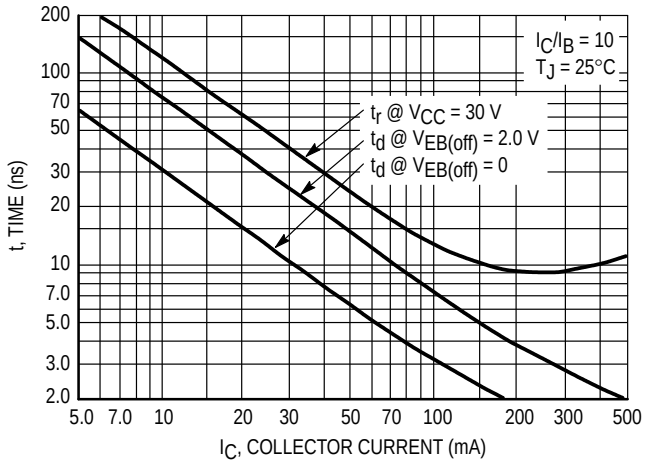


**Figure 7. Frequency Effects**

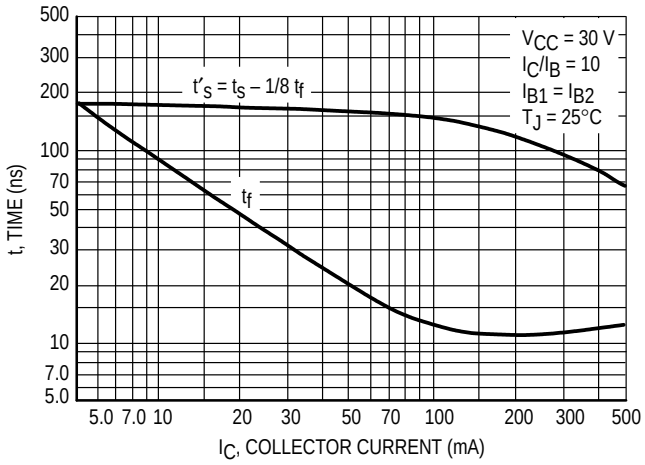


**Figure 8. Source Resistance Effects**

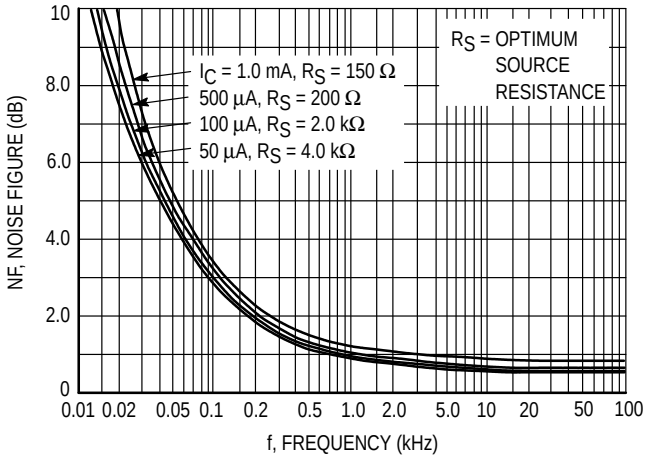


**Figure 9. Capacitances**

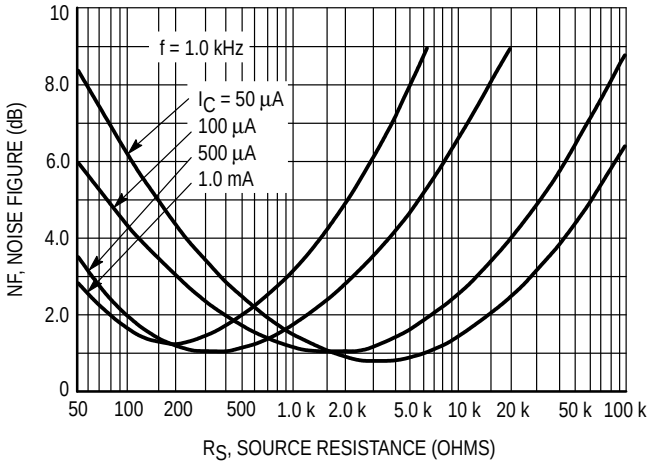


**Figure 10. Current–Gain Bandwidth Product**

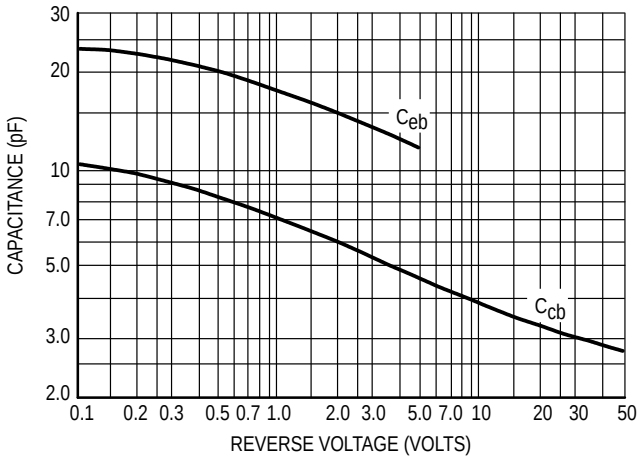


**Figure 11. “On” Voltages**

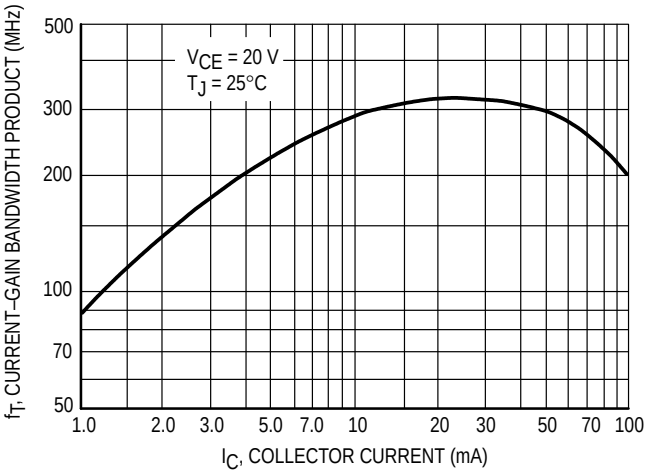


**Figure 12. Temperature Coefficients**

## PACKAGE DIMENSIONS

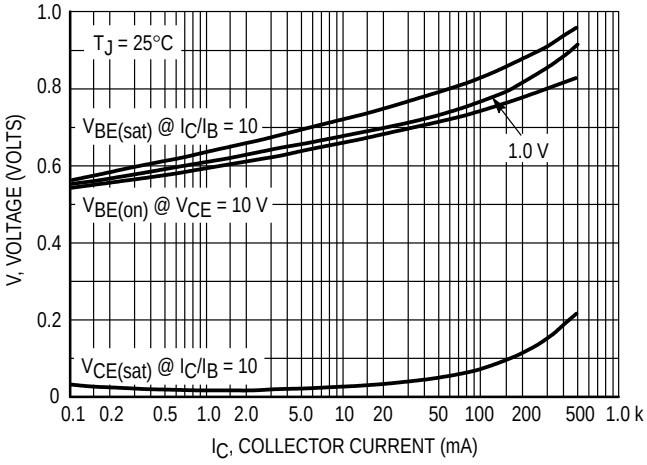


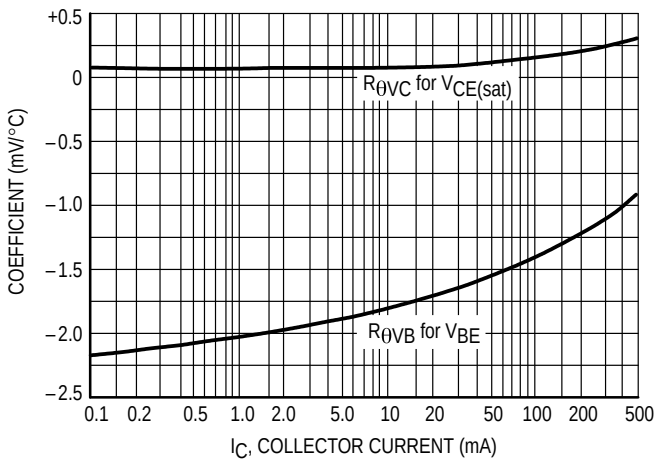


SECTION X–X

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

| | INCHES | | MILLIMETERS | |
|---|---|---|---|---|
| DIM | MIN | MAX | MIN | MAX |
| A | 0.175 | 0.205 | 4.45 | 5.20 |
| B | 0.170 | 0.210 | 4.32 | 5.33 |
| C | 0.125 | 0.165 | 3.18 | 4.19 |
| D | 0.016 | 0.022 | 0.41 | 0.55 |
| F | 0.016 | 0.019 | 0.41 | 0.48 |
| G | 0.045 | 0.055 | 1.15 | 1.39 |
| H | 0.095 | 0.105 | 2.42 | 2.66 |
| J | 0.015 | 0.020 | 0.39 | 0.50 |
| K | 0.500 | — | 12.70 | — |
| L | 0.250 | — | 6.35 | — |
| N | 0.080 | 0.105 | 2.04 | 2.66 |
| P | — | 0.100 | — | 2.54 |
| R | 0.115 | — | 2.93 | — |
| V | 0.135 | — | 3.43 | — |

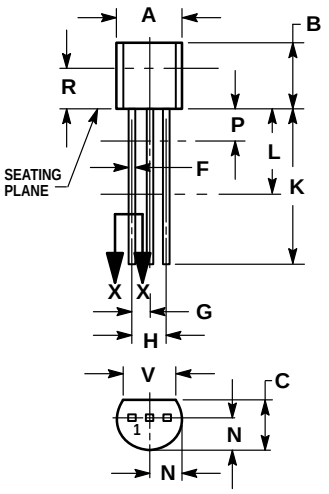**CASE 029–04**
**(TO–226AA)**
**ISSUE AD**

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**
**USA / EUROPE / Locations Not Listed**: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

**MFAX**: RMFAX0@email.sps.mot.com – TOUCHTONE 602–244–6609
**INTERNET**: http://Design–NET.com

**JAPAN**: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

**ASIA / PACIFIC**: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298